6P6C EZ RJ-11 Voice Module, 25 PK

PRODUCT SPECIFICATION

Package includes:

A. 6P6C EZ RJ-11 Voice Module, 25 pcs
B. Wire Cap, 25 pcs
C. Installation Instructions, 1 sheet
D. Packaging Bag, 1 pc

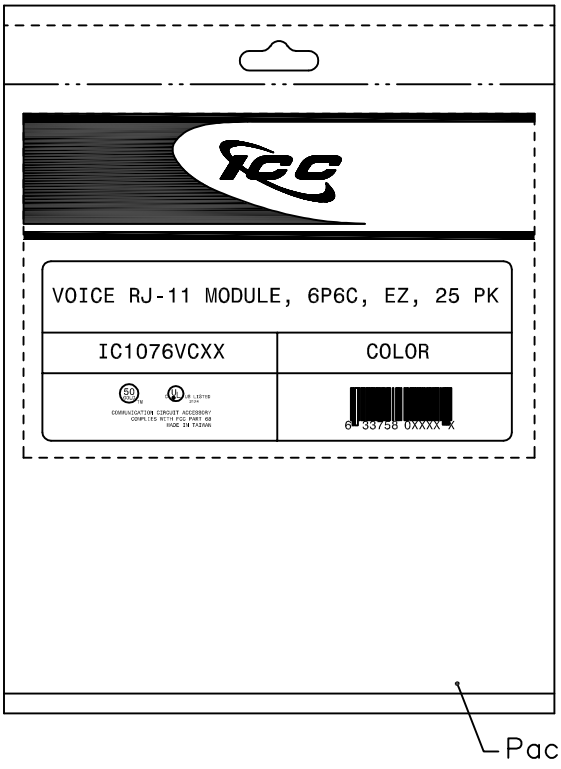

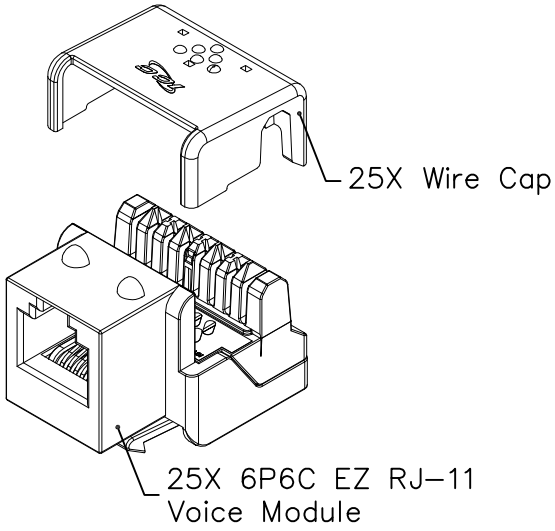

Features and Benefits:

- Designed for all voice connectivity applications.
- Lead frame technology provides maximum performance and uninterruptible signal integrity.
- Engineered to provide 110 IDC termination reducing installation time.
- One piece termination cap allows for a quick and easy termination.
- Includes an integrated USOC/UTP color wiring diagram.
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels.
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes.
- Used with ICC ICLC4, ICLC6 line cords and 110 punch down tool ICACSPDT00.
- Available in ivory and white.
- 25 modules packaged in packaging bag with 25 wire caps packaged in a separated bag and included in packaging bag.
- ANSI/TIA-568-C and UL 1863 compliant

MODULE, VOICE, RJ-11, EZ, 25 PK			
ITEM NO.	IC1076VCXX	REV. H	
DWG NO.	PS1076VC00	PAGE NO. 1	

Premium Products
Proven Performance
Competitive Prices

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) *2100 E. Valencia Dr, Suite D, Fullerton, CA 92831* www.icc.com

© 2015 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.











USOC WIRING	
6	BLUE
5	YELLOW
4	GREEN
3	RED
2	BLACK
1	WHITE

UTP WIRING	
6	GREEN
5	ORANGE
4	WHITE/BLUE
3	BLUE
2	WHITE/ORANGE
1	WHITE/GREEN



NOTE: UNLESS OTHERWISE SPECIFIED

1. RJ-11 VOICE MODULE:
   - A. ELECTRICAL:
     - -CURRENT RATING: 1.5 AMPS MAX
     - -VOLTAGE RATING: 150 VOLTS ALTERNATING
     - -DIELECTRIC WITHSTANDING VOLTAGE: 1000 VOLTS RMS, 60 HZ
     - -INSULATION RESISTANCE: > 10 MOHMS
   - B. MECHANICAL:
     - -MATED FORCE: 5 LBS MAX
     - -UNMATED FORCE: 5 LBS MAX
     - -PLUG RETENTION FORCE: 20 LBS MIN
     - -DURABILITY: 750 CYCLES
   - C. PHYSICALS:
     - -HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
     - -CONTACT: PHOSPHOR BRONZE ALLOY PLATED WITH 50 µin OF GOLD OVER 70~100 µin OF NICKEL
     - -GOLD PLATING: 1.27 MICRON/50 µin MIN
     - -CONNECTOR: INSULATION DISPLACEMENT CONNECTOR (IDC) ACCEPTS 22~24 AWG SOLID WIRE
   - D. COLORS: XX: WH-WHITE, IV-IVORY

NEXT: (NEAR END CROSS TALK)	1 MHz > 65 dB
	10 MHz > 50 dB
	16 MHz > 46 dB
	20 MHz > 44 dB
INSERTION LOSS:	
	10 MHz > 0.008 dB
	16 MHz > 0.02 dB

c UL us FILE NO. 125268

MODULE, VOICE, RJ-11, EZ, 25 PK			
ITEM NO.	IC1076VCXX	REV.	H
DWG NO.	PS1076VC00	PAGE NO.	2

ICC Premium Products Proven Performance Competitive Prices

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) *2100 E. Valencia Dr, Suite D, Fullerton, CA 92831* www.icc.com

© 2015 ICC. THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF ICC. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT ICC'S APPROVAL IS STRICTLY PROHIBITED. ICC AND THE ICC LOGO ARE THE TRADENAME AND REGISTERED TRADEMARK OF ICC. ALL RIGHTS RESERVED.